

TECHNICAL DATA SHEET

Coengy™ Coenzyme Q10 Powder

10% CWS OMTN

Chemical Properties


CAS No.: 303-98-0

INCI name: Ubiquinone 10

EINECS No.: 206-147-9

Chemical Formula: C₅₉H₉₀O₄

Molecular Weight: 863.36

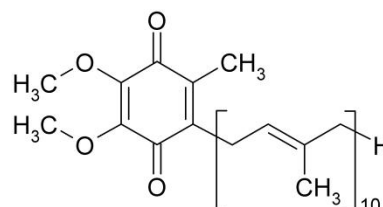

Description

Coenzyme Q10 (CoQ10) is a substance that is found naturally in the body and helps convert food into energy. CoQ10 is found in almost every cell in the body, and it is a powerful antioxidant.

Solubility

Easy soluble in water, transparent liquid.

Specification

Item	Specification	Test Method
Appearance	Yellow to orange yellow free flowing powder	Visual
Content	Min 10%	In-house
Particle size	Min 90% go through 60 mesh	In-house
Moisture	Max 5.0%	In-house
Heavy metals	Max 10ppm	In-house
Lead	Max 3ppm	In-house
Arsenic	Max 2ppm	In-house
Total Plate Count	Max 1,000cfu/g	In-house
Yeast & Mold	Max 100cfu/g	In-house
Coliforms	Max 0.3MPN/g	In-house
<i>E.Coli</i>	Negative	In-house
<i>Salmonella</i>	Negative	In-house

Ingredients

Coenzyme Q10 10.0%, Modified Starch 50.0%, Maltodextrin 37.0%, VE oil 2.0%, SiO₂ 1.0%. (O is short for Modified Starch, M is short for Maltodextrin, T is short for VE oil, N is short for SiO₂)

Labeling

In the United States and the European Union: Coengy™ Coenzyme Q10 Powder
10% CWS

Applications

1. There's evidence that CoQ10 may help treat heart failure when combined with conventional medications.
2. CoQ10 may lower blood pressure.
3. CoQ10 supplements may improve heart health and blood sugar and help manage high blood pressure in people with diabetes.
4. CoQ10 supplements led to faster healing and tissue repair.
5. Coenzyme Q10 may be of benefit as an ingredient for topical cosmetic products.

Safety

This product is safe for the intended use. Avoid ingestion, inhalation of dust or direct contact by applying suitable protective measures and personal hygiene. See Material Safety Data Sheet for full safety information.

Handling recommendations

Technical measures: Processing in closed systems; avoid dust formation; consider dust explosion hazard; take precautionary measures against electrostatic charging; local exhaust ventilation necessary.

Suitable materials: Stainless steel, aluminium, glass, polyethylene and enamel

Packaging, Storage & Shelf Life

Package	10kg carton with two 5kg aluminum drums inside; or according to customers' requirements.
Storage	Store in a well-closed container away from moisture and direct sunlight.
Shelf Life	2 years if sealed and stored properly.